


Car Parks Drained By Linear Drainage Channels. If Desired, Car Parks Could be Permeable Surfaces as Example 1, with Discharges Passed to Attenuation Pond

Car Park / Access Road Drainage to Pass to Class 1 Oil Separator

Attenuation Pond - Required Storage Volume = 1000m³
Flow Control Located in Chamber Downstream of Outfall

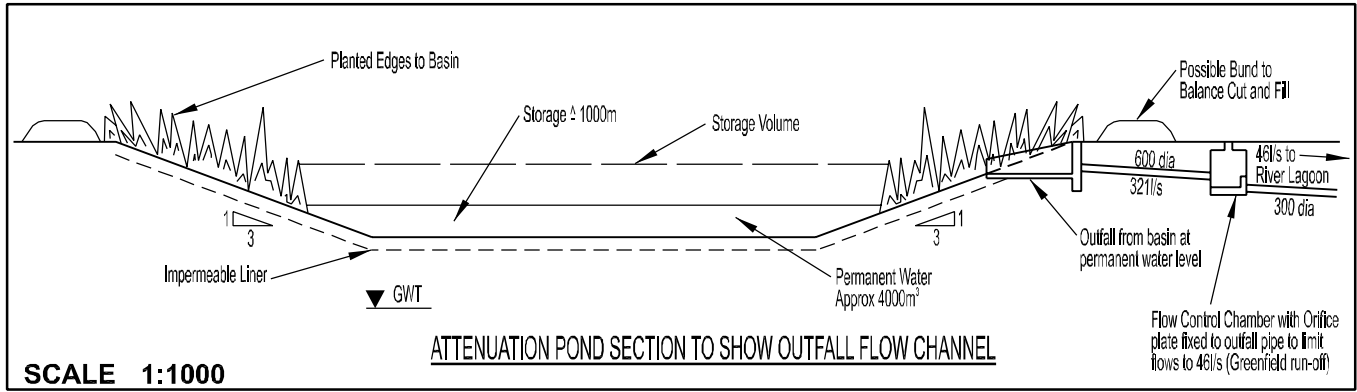

Example 2 - Site Attenuation Pond
114200 **FIGURE B3**